

DeltaWedge


No More Screeding To Falls!



DeltaWedge are insulated waterproof construction panels manufactured with a gradient to one surface. DeltaWedge is ideally suited for projects where falls to floor need to be created over existing level floors in environments such as wetrooms, balconies, roof terraces etc .

A tough surface coating provides the perfect surface for the application of tiles. Creating accurate falls over long distances is easily achieved by using DeltaBoard as a raising course.

Ideal for balconies and roof terraces, DeltaWedge are lightweight and easy to install ensuring required falls are achieved and maintained. Using DeltaWedge to create falls to floors provides quick installation time. Floors created with DeltaWedge can usually be tiled within 4 hours after fixing.


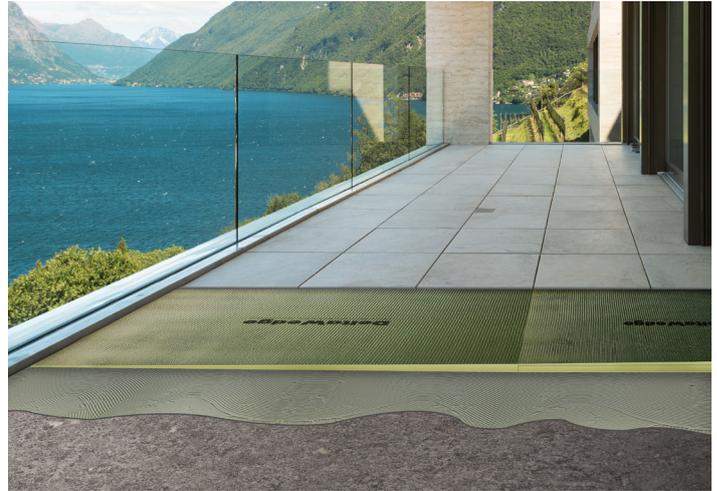


Technical Data

Properties	Value
Compressive Strength (10% compression)	300 kPa
Thermal Conductivity to BSEN 13164 (5 years)	0.033 W/Mk
Water Absorption by volume tested to BSEN 12087	0.6%
Density (foam core only)	36 kg/m ³
Temperature Range	-50°C, + 75°C
Fire Performance BS 476 part 6,7 surface spread of flames / EN 13501-1	Class O / Euroclass E



How to extend - using Delta Wedge

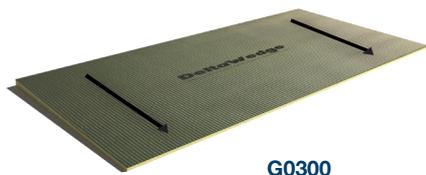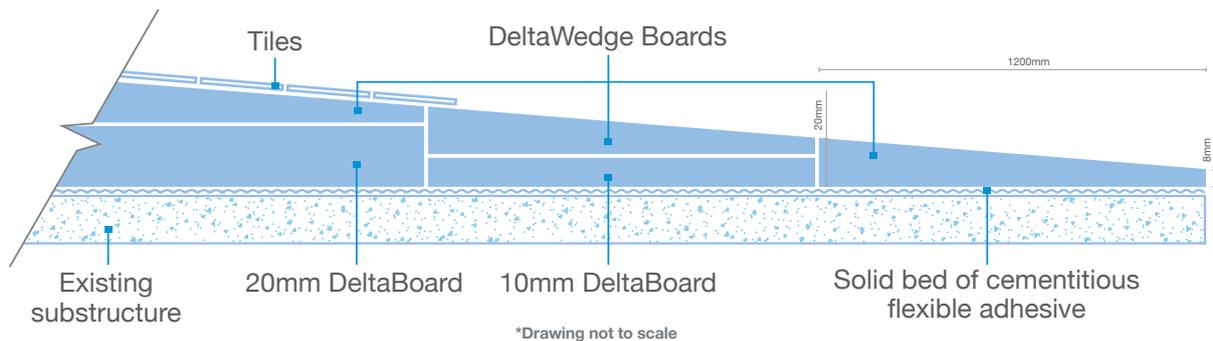

G0300



G0305



G0310

Product ID	Thickness	Fall Across Length	Width	Weight	Gradient of Fall
G0300	20mm reducing to 8mm	600mm	1200mm	2.7 Kg	2%
G0305	20mm reducing to 8mm	1200mm	1200mm	5.4 Kg	1%
G0310	20mm reducing to 8mm	1200mm	600mm	2.7 Kg	1%

What's Under Your Tiles? For more information or bespoke sizes to suit your needs please contact head office.